


Removing Head Bolt

3



CYLINDER HEAD BOLT SOCKET WRENCH · SET

No. <b>HB352</b>	▼g300	📦5
HB35-8, 10		



mm				
No.	S	L	▼g	📦
HB35 - 8	8	80	140	5
- 8T	8	90	150	5
-10	10	105	160	5

Purpose

- For use on head bolt with hexagon end.

**CAUTION** • DO NOT USE A TOOL WITH A POWER TOOL SUCH AS AN IMPACT WRENCH, ETC.

●1/2"sq. CYLINDER HEAD BOLT SOCKET WRENCH-SET



- Hexagon bolt is made of special spring steel for superb durability.
- Also can be used on cap screw bolts (with hexagon hole) 8mm. & 10mm.

CYLINDER HEAD BOLT SOCKET WRENCH-SET

No. <b>B3502</b>	▼kg 1.3	📦1
B350-10, 12		



mm(12pt.)				
No.	S	L	▼g	📦
B350 -10	10	190	600	5
-12	12	200	700	5

FPurpose

- Special wrench for removing/installing engine cylinder head bolts.

**CAUTION** • DO NOT USE A TOOL WITH A POWER TOOL SUCH AS AN IMPACT WRENCH, ETC.

●1/2"sq. CYLINDER HEAD BOLT SOCKET WRENCH-SET

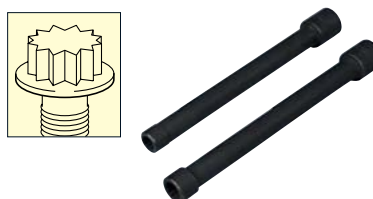

- Socket part with suitable wall thickness properly treated for superb durability.

CYLINDER HEAD BOLT & FLY-WHEEL BOLT WRENCH-SET

No. <b>ATBP603</b>	▼kg 1.6	📦1
For head bolts	ABP6-14WP	
For head bolts & fly-wheels	ABP6-19WP, 22WP	

mm(Triple Square)							
No.	S	D <sub>1</sub>	D <sub>2</sub>	H	L	▼g	📦
ABP6-14WP	14	22.5	38	15	140	400	5
-17WP	17	26	38	16	90	540	5
-19WP	19	29	38	16	90	550	5
-22WP	22	33	38	16	120	650	5

POWERBIT

Usage


- This is a wrench that is exclusively designed for the removal and installation of engine cylinder head bolts and fly-wheel bolts.

Characteristics

- For bolts of Isuzu and Mitsubishi-fuso and fly-wheel bolts.

**CAUTION** • DO NOT USE A TOOL WITH A POWER TOOL SUCH AS AN IMPACT WRENCH, ETC.

●3/4"sq. CYLINDER HEAD BOLT & FLY-WHEEL BOLT WRENCH-SET



- This 4 pcs. set can be used on both head bolts and fly-wheel bolts of Isuzu and Mitsubishi-Fuso cars.

TRIPLE SQUARE (12P) WRENCH

No.	S	sq.	D	L	ℓ	▼g	📦
BT3-M 8	M8	3/8"	18.5	72	43	65	10
-M10	M10	3/8"	18.5	72	43	65	10
BT4-M12	M12	1/2"	22	76	40	110	10

POWERBIT

Purpose

- Special wrench for special bolts with triple square holes such as head bolts, flange bolts of torsion joints, etc. of German cars.

**CAUTION** • DO NOT USE A TOOL WITH A POWER TOOL SUCH AS AN IMPACT WRENCH, ETC.

●3/8" & 1/2"sq. TRIPLE SQUARE (12P) WRENCH

